




# FasTop™ 12SL Self-Leveling Urethane Slurry System

**General Polymers FasTop 12SL SELF-LEVELING URETHANE SLURRY SYSTEM** is a self-leveling slurry to be applied at 1/16" smooth finish or broadcast with aggregate to yield 1/8" with a non-skid finish, **FasTop 12SL** can be applied with a 3/8" notched squeegee or notched trowel, or screed rake. **FasTop 12SL** is designed for light to moderate traffic and abuse, while still providing the many benefits of a urethane concrete system. For heavier abuse or traffic see other **FasTop 12** Systems. It is designed to protect concrete and steel substrates from thermal shock, impact, corrosion, and chemical attack.

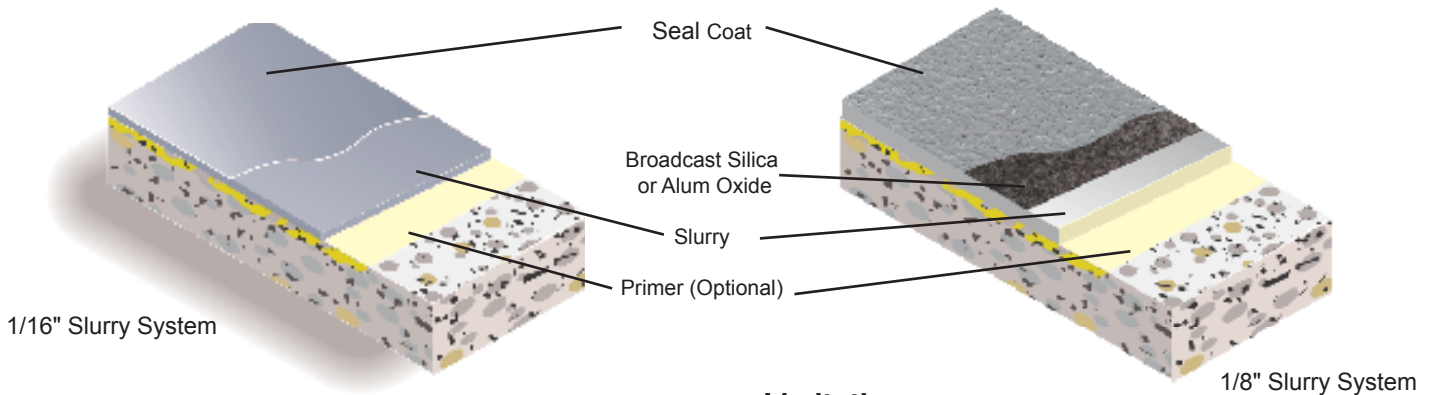

## Advantages

- Can be applied to "green" concrete
- Rapid cure and hardness development
- Water based
- Hot cooking oil and steam resistance
- Low temperature cure
- Will not lose bond due to thermal shock
- Impact resistant
- Moisture Resistant
- Maintains bond with vapor emissions up to 8 lbs.\* must be minimum 1/8" system if coating with a non-breathing sealer, 90% RH
- Acceptable for use in USDA inspected facilities
- Resistant to:

28 Day Exposure @ 72°F	Result
	NE= No Effect
Alcohol	NE
Ethylene Glycol	NE
Fats, Oils & Sugars	NE
Gasoline, Diesel & Kerosine	NE
Hydrochloric Acid (<35%)	NE
Lactic Acid (Milk)	NE
Mineral Oils	NE
Most Organic Solvents	NE
Muriatic Acid	NE
Nitric Acid (<10%)	NE
Nitric Acid (<30%)	Slight Softening
PM Acetate	NE
Phosphoric Acid (<50%)	NE
Potassium Hydroxide (<50%)	NE
Sodium Hydroxide (<50%)	NE
Sulfuric Acid (<50%)	Slight Gloss Loss
Water	NE
Xylene	NE

## Uses

- Warehouses
- Aircraft Hangars
- Manufacturing Flooring
- Garages

## Limitations

- Protect material from freezing

## Typical Physical Properties

Color	Red, Light Gray or Dark Gray
Decorative Upgrade:	Selected Ceramic Carpet Blends
Cure Time	12 hours
Recoat	6-8 hours
Foot Traffic	10-12 hours
Full Service	20-30 mgs lost
Abrasion Resistance	ASTM D 4060, CS-17 Wheel, 1,000 cycles
Hardness, Shore D	75
ASTM D 2240	
Tensile Strength	550-600 psi
ASTM C 307	
Compressive Strength	5,000 psi
ASTM C 579	
Flexural Strength	3,700 psi
ASTM C 580	
Adhesion	300 psi
ACI 503R	concrete failure
Impact Resistance	Withstands 16 ft lbs
MIL-D-3134, Sec.4.7.3	without cracking, delamination or chipping
Flammability	Self-Extinguishing over concrete
Critical Radiant Flux	>1.0
ASTM E 648	
Smoke Density	287-346
ASTM E 662	
Coefficient of Friction	>0.80
ASTM D 2047	
Service Temperature at 3/16"	-50°F - 300°F
Shrinkage	Nil
Water Absorption	Nil

## Installation

General Polymers materials shall only be installed by approved contractors. The following information is to be used as a guideline for the installation of the **FasTop 12SL SELF-LEVELING URETHANE SLURRY SYSTEM**. Contact the Technical Service Department for assistance prior to application.

## Surface Preparation - General

General Polymers systems can be applied to a variety of substrates, if the substrate is properly prepared. Preparation of surfaces other than concrete will depend on the type of substrate, such as wood, concrete block, quarry tile, etc. Should there be any questions regarding a specific substrate or condition, please contact the Technical Service Department prior to starting the project. Refer to Surface Preparation (Form G-1).

## Surface Preparation - Concrete

Concrete surfaces shall be abrasive blasted to remove all surface contaminants and laitance. The prepared concrete shall have a surface profile equal to CSP 3-4. Refer to Form G-1. Consult the Technical Service Department if oil or grease is present.

After initial preparation has occurred, inspect the concrete for bug holes, voids, fins and other imperfections. Protrusions shall be ground smooth while voids shall be filled with a General Polymers system filler. For recommendations, consult the Technical Service Department.

## Limitations

The substrate must be structurally sound, cleaned of any foreign matter that will inhibit adhesion.

Do not apply in temperatures below 40° F or above 85° F or when relative humidity is greater than 85%. If substrate is not concrete or metal as described in Surface Preparation (Form G-1) then do not apply. Call Technical Service Department for recommendation. Working time is reduced with air movement and high humidity.

When installing FasTop 12SL, if encountering concrete outgassing, please discontinue installation and apply 3477 Epoxy Water Emulsion Primer / Sealer. Allow to dry until tack free and proceed with the FasTop 12SL installation.

- **Do not featheredge.**
- **Do not mix partial units.**
- **Do not hand mix. Do not let mixed material sit in a bucket, even a 2-3 minute delay in pouring will reduce working time.**
- **Allow FasTop 12S/SL to cure a minimum of 12 hrs prior to optional topcoat(s) other than GP4090TC**
- **If patching, sloping, filling joints, etc. with any FasTop materials, allow the repair material to cure for a minimum of 8 hours before covering with 12S or 12SL.**
- **Do not apply to cracked or unsound substrates.**
- **Do not install outside, call Technical Service Department.**

**Full chemical resistance is achieved after a seven (7) day cure. Consult the Technical Service Department for specific chemical resistance.**

## Temperature

Throughout the application process, substrate temperature should be 50°F – 90°F. Substrate temperature must be at least 5°F above the dew point. Applications on concrete substrate should occur while temperature is falling to lessen offgassing. The material should not be applied in direct sunlight, if possible. Protect material from freezing prior to installation.

## Application Information – Surface Prep Profile CSP 3-4

VOC MIXED		MATERIAL	MIX RATIO	THEORETICAL COVERAGE PER COAT CONCRETE	PACKAGING
<200 g/L	<b>Optional Primer for outgassing</b>	3477	2:1	250 sq. ft./gal	3 or 15 gals
<50 g/L 0	<b>Slurry 1/16" (Optional)</b>	4080 5035	Pre-measured unit 35 lbs	60-65 sq. ft./ unit 35 lbs.	1.8 gals 35 lbs.
<50 g/L 0 0	<b>Slurry 1/8" Broadcast Standard Dry Silica Sand 20-40 mesh</b>	4080 5035 5310-8	Pre-measured unit 35 lbs To Excess	60-65 sq. ft./ unit 35 lbs. 400 lbs / 1,000 sq.ft.	1.8 gals 35 lbs. 50 lbs.
<50 g/L 0	<b>Seal Coat</b>	4090TC 5095	Pre-measured A and B components Plus 8 lbs aggregate (GP5095) TC = 1.25 gallons per kit	80-120 sq. ft./ 1.25 gal	0.9 gal 8 lbs.

## Primer

### Mixing and Application

1. Premix 3477A (resin) and 3477B (hardener) separately, using a low speed drill and Jiffy blade. Mix for one minute and until uniform, exercising caution not to whip air into the materials.

2. Add 2 parts 3477A (resin) to 1 part 3477B (hardener) by volume. Mix with low speed drill and Jiffy blade for three minutes and until uniform. DO NOT mix more material than can be used within 4 hours. Apply material with a short nap roller at a spread rate of 250 sq. ft. per gallon.

DO NOT ALLOW TO PUDDLE. Any uneven or textured surfaces will require more material than an even surface.

## Slurry @ 1/16"

### Mixing and Application

DO NOT PREMIX 4080 PART B HARDENER. OVER EXPOSURE TO AIR EFFECTS PHYSICAL PROPERTIES

1. Add 4080A (resin) to 4080B (hardener) and mix with low speed drill and Jiffy mixer until uniform.

2. Pour 35 lbs. 5035 aggregate and 1 pre-measured unit (1 gal Part A : short-filled gal Part B) until no lumps remain. Immediately pour mixed material onto the substrate and pull out using a 3/8" notched squeegee or notched trowel, or screed rake. Place all material within 15 minutes. Back roll with a loop roller to assist leveling. Allow material to self-level (2-5 minutes).

3. Allow to cure (Cure times vary depending on environmental conditions).

4. Apply topcoat options or use as a base coat for other General Polymers Brand systems.

## Slurry @ 1/8"

### Mixing and Application

DO NOT PREMIX 4080 PART B HARDENER. OVER EXPOSURE TO AIR EFFECTS PHYSICAL PROPERTIES

1. Add 4080A (resin) to 4080B (hardener) and mix with low speed drill and Jiffy mixer until uniform.

2. Pour 35 lbs. 5035 aggregate and 1 pre-measured unit (1 gal Part A : short-filled gal Part B) until no lumps remain. Immediately pour mixed material onto the substrate and pull out using a 3/8" notched squeegee or notched trowel, or screed rake. Place all material within 15 minutes. Back roll with a loop roller to assist leveling. Allow material to self-level (2-5 minutes).

3. Broadcast Silica Sand (20-40 Mesh) to saturation (about 400# per 1000 square feet).

4. Allow to cure for a minimum of 4-5 hours, sweep off excess sand with a clean, stiff bristled broom. Clean sand can be saved for future use. All imperfections such as high spots should be smoothed before the application of the seal coat.

NOTE: Dry Silica Sand distribution is critical to the success of the application. The floor's finished appearance depends on the manner in which the sand has been applied. In grass seed like fashion, allow the sand to fall after being thrown upward and out. DO NOT THROW DOWNWARD AT A SHARP ANGLE USING FORCE.

5. Allow to cure (Cure times vary depending on environmental conditions).

## Topcoat

### Mixing and Application

DO NOT PREMIX Part A or Part B

1. Combine 4090TCA (resin) with GP5095 Part C (aggregate) TC = 1.25 gallons per kit and mix until lump free, approximately 60-90 seconds, the product will thicken and become creamy, which lessens the potential for fine cement/pigment balls to form. Add part B and mix until fully combined and uniform in color, approximately 30 seconds.

2. Apply 4090TC using trowel, squeegee, or grout float and backroll with a 1/4" - 3/8" nap roller to remove any marks and provide uniform texture, in thicker films >10 mils loop rollers may also prove effective. Spread at a rate of 80-120 square feet per gallon, evenly, with no puddles making sure of uniform coverage. Take care not to puddle materials and insure even coverage.

NOTE: Do not dip and roll. Do not roll out of a puddle or ribbon. Must apply using squeegee or trowel.

3. Allow to cure 6 hours minimum before opening to light foot traffic. If recoating is required, abrade surface before recoating.

\* When applied direct to concrete, FasTop 12TC can be loop rolled after 20-30 minutes to create a non-skid coating without the addition of broadcast aggregate. Contact Tech Service for details.

## Cleanup

Clean up mixing and application equipment immediately after use. Use toluene or xylene. Observe all fire and health precautions when handling or storing solvents.

## Safety

Refer to the MSDS sheet before use. federal, state, local and particular plant safety guidelines must be followed during the handling and installation and cure of these materials.

Safe and proper disposal of excess materials shall be done in accordance with applicable federal, state, and local codes.

## Material Storage

Store materials in a temperature controlled environment (50°F – 90°F) and out of direct sunlight.

Keep resins, hardeners, and solvents separated from each other and away from sources of ignition.

## Maintenance

Occasional inspection of the installed material and spot repair can prolong system life. For specific information, contact the Technical Service Department.

## Shipping

- Destinations East of the Rocky Mountains are shipped F.O.B. Cincinnati, Ohio.
- Destinations West of the Rocky Mountains are shipped F.O.B. Victorville, California.

For specific information relating to international shipments, contact your local sales representative.

## Disclaimer

The information and recommendations set forth in this document are based upon tests conducted by or on behalf of The Sherwin-Williams Company. Such information and recommendations set forth herein are subject to change and pertain to the product(s) offered at the time of publication. Published technical data and instructions are subject to change without notice.

Consult [www.generalpolymers.com](http://www.generalpolymers.com) to obtain the most recent Product Data information and Application instructions.

## Warranty

The Sherwin-Williams Company warrants our products to be free of manufacturing defects in accord with applicable Sherwin-Williams quality control procedures. Liability for products proven defective, if any, is limited to replacement of the defective product or the refund of the purchase price paid for the defective product as determined by Sherwin-Williams, NO OTHER WARRANTY OR GUARANTEE OF ANY KIND IS MADE BY SHERWIN-WILLIAMS, EXPRESSED OR IMPLIED, STATUTORY, BY OPERATION OF LAW OR OTHERWISE, INCLUDING MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE.



### To learn more, visit us at

[www.sherwin-williams.com/protective](http://www.sherwin-williams.com/protective)  
or call 1-800-524-5979  
to have a representative contact you.